


Analóg modul MULTICAL® 601-hez

(rövid ismertető a Technical Description alapján; lsd. még az installációs leírást)

0/4...20 mA outputs (67-00-23)

The module is furnished with two active analogue outputs, which can both be configured for 0...20 mA or for 4...20 mA. In addition, the outputs can be configured to any measuring value (power, flow, or temperature) and to any range scaling.

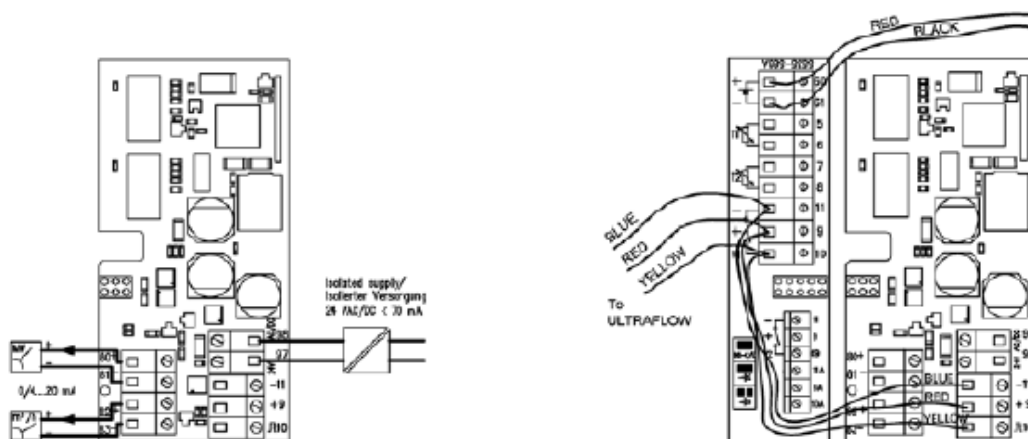

The module must be mounted in MULTICAL® 601. It cannot be used separately together with flow meters.

The configuration is carried out via the menu "Bottom module" in METERTOOL

This will occupy the base module position, if you need further communication some modules (Lon, M-Bus, Radio) can be installed into an external communication box and connected by cable to MULTICAL® 601 by use of the Topmodule 67-05 (Supporting only actual data from calculator).

If you install the 670023 into the MULTICAL® 601 you can get the 4-20mA output from the flowmeters. If you setup the module to "Flowpulses" you will the same functionallety as before.

Lsd. még a **66-0E** típus számú 0/4...20 mA analóg output modul magyar nyelvű leírását meglévő MULTICAL® III illetve MULTICAL® 66C számítógységekhez, illetve ULTRAFLOW-hoz.